

पुनः कोटेशन आमंत्रित करने की सूचना
RE- NOTICE INVITING QUOTATION

सीपीडब्ल्यूडी, महाराष्ट्र राज्य पीडब्ल्यूडी, रेलवे, एमईएस के साथ पंजीकृत योग्य ठेकेदारों या सड़क सुरक्षा उपकरणों के निर्माता डीलर से 26 / 02 / 2025 को अपराह्न 3.00 बजे तक नीचे उल्लिखित कार्य के लिए निदेशक, आईआईएसईआर पुणे की ओर से अधोहस्ताक्षरी द्वारा दो लिफाफा प्रणाली में मुहरबंद कोटेशन आमंत्रित किए जाते हैं। नीचे उल्लिखित कार्य के लिए सिविल / समग्र श्रेणी (कोई एक) या अनुमोदित आवेदकों की उचित श्रेणी में कोटेशन उसी दिन अपराह्न 3.30 बजे खोले जाएंगे।

Sealed quotations in two envelop system are hereby invited by the undersigned on behalf of the Director, IISER Pune for the work mentioned below up to 3.00 PM on 26 / 02 / 2025 from eligible contractors registered with anyone CPWD, Maharashtra State PWD, Railways, MES in appropriate category of Civil/Composite category (any one) or manufacture or dealer of road safety equipment's for the work mentioned below. The quotations will be opened at 3.30 PM on the same day.

कार्य का नाम: आईआईएसईआर पुणे में विभिन्न स्थानों पर साइनेज पोस्ट उपलब्ध कराना और ठीक करना।
NAME OF WORK : Providing and fixing signages post at various location in IISER Pune.
Issue to –

ठेकेदार का नाम और पता -

Name and address of the agency –

नियम और शर्तें:

Terms and Conditions:

आवेदक सीपीडब्ल्यूडी, महाराष्ट्र राज्य पीडब्ल्यूडी, रेलवे, एमईएस, या सड़क सुरक्षा उपकरणों के निर्माता डीलर से में वैध पंजीकरण प्रमाण पत्र के साथ सिविल / कम्पोजिट की उपयुक्त श्रेणी में पंजीकृत पात्र ठेकेदार होना चाहिए या कोटेशन के साथ प्रस्तुत किए जाने वाले अनुभव प्रमाण पत्र के साथ चाहिए। न्यूनतम पात्रता मानदंडों को पूरा नहीं करने वाले बोलीदाताओं को सरसरी तौर पर खारिज कर दिया जाएगा।

The applicant should be eligible contractors registered with anyone CPWD, Maharashtra State PWD, Railways, MES or manufacture or dealer of road safety equipment's in appropriate category of Civil/Composite with valid Registration Certificate with Experience Certificate to be submitted along with the quotation. Bidders not meeting the minimum eligibility criteria shall be summarily rejected.

- 1) कार्य पूरा करने की समय अवधि आईआईएसईआर पुणे द्वारा कार्य आदेश देने की तिथि से 30 (तीस) दिन होगी। कोटेशन खोलने के बाद बैक-आउट का कार्य ऐसी एजेंसियों को आईआईएसईआर पुणे के भविष्य के कोटेशन में भाग लेने से वंचित कर देगा। बोलीदाता maintenance@iiserpune.ac.in पर ई-मेल कर सकते हैं या उपरोक्त निर्दिष्ट कोटेशन जमा करने की तिथि से एक दिन पहले सभी कार्य दिवसों पर हार्ड कॉपी में आईआईएसईआर पुणे कार्यालय में जमा कर सकते हैं।

Time period for completion of the work shall be 30 (Thirty) Days from the date of placing the work order by IISER Pune. The act of backing-out after opening of quotation will debar such agencies for participating in the future quotations of IISER PUNE. Bidder may e-mail queries on mailto:enquiries@iiserpune.ac.in or submit to IISER PUNE office in hard copy on all working days one day before submission date of quotation as specified above.

- 2) सूचना आमंत्रण (एनआईक्यू) दस्तावेज आईआईएसईआर पुणे से 121, इंजीनियरिंग अनुभाग, मुख्य भवन, आईआईएसईआर पुणे परिसर, डॉ होमी भाभा रोड, पाषाण, पुणे-411008 से सभी कार्य दिवसों में सुबह 10 बजे से शाम 4 बजे के बीच प्राप्त किया जा सकता है। प्रस्तुत करने। आवेदक आईआईएसईआर पुणे की वेबसाइट <http://www.iiserpune.ac.in/links/tender-notices-and-eoi> से एनआईक्यू दस्तावेज प्राप्त करके कोटेशन जमा कर सकते हैं।

Notice Inviting Quotation (NIQ) document may be obtained from IISER PUNE at 121, Engineering Section , Main Building, IISER PUNE Campus, Dr.Homi Bhabha Road, Pashan, Pune-411008 between 10 AM to 4 PM on all working days before date of submission. Applicant may submit quotation by obtaining NIQ document from IISER PUNE website at <http://www.iiserpune.ac.in/links/tender-notices-and-eoi>

- 3) सभी एजेंसियों को अपना कोटेशन हार्ड कॉपी में एक सीलबंद लिफाफे में दो लिफाफों में एक तकनीकी क्रेडेंशियल्स और दूसरा वाणिज्यिक प्रस्ताव उचित माध्यम से नियत तिथि पर अपराह्न 3 बजे तक जमा करना होगा। ऊपर निर्दिष्ट तिथि और समय के बाद प्राप्त कोटेशन स्वीकार नहीं किया जाएगा। किसी भी देरी, डाक देरी आदि पर विचार नहीं किया जाएगा। एजेंसी को मात्रा के संलग्न बिल के लिए केवल प्रतिशत दर उद्धृत करनी चाहिए। शब्दों में उद्धृत प्रतिशत दर को एल1 बोलीदाता तय करने के लिए अंतिम माना जाएगा। बोली को मूल बोली दस्तावेज (आईआईएसईआर, पुणे या वेबकॉपी द्वारा जारी किए गए अनुसार) में कार्य के नाम के ऊपर लिखा हुआ प्रस्तुत किया जाएगा। कोटेशन खोलने की तारीख से 60 दिनों के लिए उद्धृत दर वैध होगी। प्रतिशत को एनआईक्यू दस्तावेज में उपलब्ध कराए गए स्थान पर हाथ से लिखा जाना चाहिए। तकनीकी रूप से योग्य बोलीदाताओं के वाणिज्यिक लिफाफे तदनुसार खोले जाएंगे। एजेंसी द्वारा इस कोटेशन के सभी नियमों और शर्तों की स्वीकृति सहित एजेंसी का प्रस्ताव व्यावसायिक रूप से स्पष्ट होना चाहिए। आईआईएसईआर पुणे बिना कोई कारण बताए कोटेशन/कोटेशनों को स्वीकार या अस्वीकार करने का अधिकार सुरक्षित रखता है। एल1 बोलीदाता के बारे में प्रभारी अभियंता का निर्णय अंतिम होगा।

All agencies need to submit their quotation in hard copy in one sealed envelope containing two envelopes one technical credentials and second commercial offer by suitable means on and before 3 PM on due date. Quotation received after the date & time specified above shall not be accepted. Any delays , postal delay etc. will not be entertained. Agency should quote only percentage rate for the attached bill of quantity. Percentage Rate quoted in the words shall be treated as Final for deciding L1 bidder. The bid shall be submitted in the original bid document (as issued by the IISER, Pune or Webcopy) super scribing the name of work. Quoted rate shall be valid for 60 days from the date of opening of quotations. Percentage shall be quoted in hand writing in the spaces provided in NIQ document. Commercial envelopes of only technically qualified bidders shall be opened accordingly. The offer of the agency should be commercially clear including acceptance of all terms and conditions of this Quotation by the agency. IISER Pune reserves the right to accept or reject the quotation/s without assigning any reasons. Engineer In-charge decision about L1 bidder shall be final.

- 4) बोली उसी दिन अपराह्न 3.30 बजे एजेंसी या उनके अधिकृत प्रतिनिधियों, यदि कोई हो, की उपस्थिति में खोली जाएगी। किसी भी शर्त के साथ

जमा किए गए कोटेशन को सशर्त कोटेशन माना जाएगा और आईआईएसईआर पुणे द्वारा सरसरी तौर पर खारिज कर दिया जाएगा।

Bids will be opened **on the same day at 3.30 PM** in the presence of agency or their authorized representatives, if any. Quotations submitted with any conditions shall be treated as conditional quotations and shall be summarily be rejected by IISER PUNE.

5) उद्धृत दरों में सभी सामग्रियों की लागत, श्रम लागत, जीएसटी (अतिरिक्त) , सभी कर, रॉयल्टी, ईंधन की लागत, ऑपरेटर, चुंगी, शुल्क, नमूने की लागत और प्रयोगशालाओं, रॉयल्टी आदि में सामग्री के परीक्षण के लिए शुल्क शामिल होना चाहिए। अतिरिक्त कुछ भी अलग से भुगतान नहीं किया जाएगा। बोलीदाता अपनी बोली से संबंधित किसी भी मामले में बोली खुलने के समय से कार्य आदेश जारी करने के समय तक आईआईएसईआर, पुणे से संपर्क करेगा नहीं। बोलीदाता द्वारा आईआईएसईआर पुणे के बोली मूल्यांकन, बोली तुलना या अनुबंध पुरस्कार निर्णयों को प्रभावित करने के किसी भी प्रयास के परिणामस्वरूप उसकी बोली को अस्वीकार किया जा सकता है। इस कार्य से संबंधित सभी मामलों में सक्षम प्राधिकारी / प्रभारी अभियंता का निर्णय अंतिम और बोली लगाने वाले के लिए बाध्यकारी होगा।

Quoted percentage shall be inclusive of cost of all the materials, labour cost , **GST EXTRA** ,all taxes, royalties, cost of fuel, operator , octroi , duties , cost of sample and fees towards testing of materials in labs ,royalties etc. complete. Nothing extra shall be paid separately. No, Bidder shall contact the IISER, Pune on any matter relating to his bid from the time of the bid opening to the time of issue of work order. Any effort by the Bidder to influence the IISER's bid evaluation, bid comparison or contract award decisions, may result in the rejection of his bid. Decision from competent authority/Engineer In-charge shall be final and binding to bidder in all the matters relating this work.

- 5) सभी स्वीकृत निर्माण बीओक्यू में निर्दिष्ट के अनुसार होंगे और सीपीडब्ल्यूडी विनिर्देशों के अनुसार, एजेंसी को तकनीकी डेटा डालना चाहिए और काम शुरू करने से पहले आईआईएसईआर पुणे के विभिन्न सामग्रियों के निर्माण पर पूर्व अनुमोदन प्राप्त करना चाहिए। सफल एजेंसी कार्य पूरा होने के मद्देनजर कार्य आदि के लिए सभी उपकरण और टैकल की अपनी व्यवस्था स्वयं करेगी। एजेंसी को एक स्रोत पर बिजली निःशुल्क उपलब्ध कराई जाएगी, एजेंसी को स्रोत से कार्य स्थल तक सुरक्षित रूप से बिजली के दोहन की व्यवस्था स्वयं करनी चाहिए। किसी भी आवश्यक मंचान को आईआईएसईआर पुणे को बिना किसी लागत के काम पूरा करने के लिए ठेकेदार द्वारा लाया जाएगा।

All approved makes shall be as specified in BOQ and as per CPWD specifications, agency should put-up technical data and obtain prior approval on makes of various materials of IISER PUNE before taking-up work. The successful agency shall make his own arrangement for all Tools & tackles for work etc. complete in view of completion of work. Electricity shall be provided free of cost to agency at one source, agency should make own arrangement to safely tap of power from source to work location. Any scaffolding required shall be brought by contractor to complete the work with no cost to IISER Pune.

- 6) आईआईएसईआर पुणे द्वारा कोई अग्रिम भुगतान नहीं किया जाएगा। उद्धृत दरों में जीएसटी, टीडीएस और अन्य लागू कर शामिल होने चाहिए। काम के बिल से इनकम टैक्स और लेबर सेस की कटौती की जाएगी।

No advance payment shall be made by IISER Pune. BOQ rates should be **excluding GST** and including TDS and other applicable taxes . Income Tax and labour cess will be deducted from the bills of the work.

- 7) कार्य बीओक्यू नवीनतम सीपीडब्ल्यूडी विनिर्देश, आईएस विनिर्देशों और आईआईएसईआर पुणे के निर्देश के अनुसार होने चाहिए। जब भी सीपीडब्ल्यूडी / आईएस विनिर्देश उपलब्ध नहीं हैं आईआईएसईआर पुणे के निर्देश के अनुसार होने चाहिए।

Specification for the work to be carried out as per BOQ, latest CPWD specification, IS specifications & as per instruction of IISER PUNE whenever specification CPWD/ IS specification are not available.

- 8) ठेकेदार यह सुनिश्चित करेगा कि श्रमिकों और कर्मचारियों को श्रम कानूनों के अनुसार न्यूनतम मजदूरी का भुगतान किया जाए। सभी आवश्यक सुरक्षा उपकरणों आदि के साथ कार्य के निष्पादन के दौरान निर्धारित मानदंडों के अनुसार एल 1 एजेंसी द्वारा मापी गई सभी सुरक्षा का पालन किया जाएगा। निष्पादन एजेंसी सुरक्षा मानदंडों और संबद्ध मुआवजे आदि के सख्त पालन के लिए एकमात्र तकनीकी-व्यावसायिक रूप से जिम्मेदार होगी।

The contractor shall ensure that minimum wages should be paid to the labours and employees in accordance with labour laws. All the safety measures shall be followed by the L1 agency as per prescribed norms during execution of work with all the necessary safety tools etc. Executing Agency shall be solely techno-commercially responsible for the strict adherence of safety norms and allied compensations etc.

- 9) एजेंसी को काम पूरा होने के 30 दिनों के भीतर भुगतान के लिए आईआईएसईआर पुणे को माप और सार पत्रक प्रस्तुत करना चाहिए।

Agency should submit measurements and abstract sheets to IISER PUNE for the payments within 30 days from completion of work. **GST shall be paid extra on BOQ rates.**

THIS IS PERCENTAGE RATE QUOTATION, BIDDER TO QUOTE PERCENTAGE ABOVE/BELOW ESTIMATED COST.

GST SHALL BE EXTRA AS PER PREVAILING RATES.


अधीक्षण अभियंता
Superintending Engineer

संलग्नक: - मात्रा की अनुसूची (बीओक्यू) - अनुलग्नक ए के अनुसार

Encl : - Schedule of Quantity (BOQ) – As per Annexure A

ANNEX-A

NAME OF WORK : Providing and fixing signages post at various location in ILISER Pune.

BILL OF QUANTITY

ITEM NO	DESCRIPTION	QTY.	UNIT	RATE WITHOUT GST	AMOUNT (Rs.)
1	Design, manufacturing, supply and fixing of retro reflective sign boards made up of 2 mm thick aluminum sheet, face to be fully covered with high intensity encapsulated type heat activated retro reflective sheeting conforming to type - IV of ASTM-D 4956-01 in blue and silver white or other colour combination including subject matter, message (bi-lingual), symbols and borders etc. as per IRC ; 67:2001, pasted on substrate by an adhesive backing which shall be activated by applying heat and pressure conforming to class -2 of ASTM-D-4956-01 and fixing the same with suitable sized aluminum alloy rivets @ 20 cm c/c to back support frame of M.S. angle iron of size 25x25x3 mm along with theft resistant measures, mounted and fixed with 2 Nos. M.S. angles of size 35x35x5 mm to a vertical post made up to M.S. Sq. Pipe 50 mm & 4mm thick welded with base plate of size 100x100x5 mm at the bottom end and including making holes in pipes, angles flats, providing & fixing M.S. message plate of required size, steel work to be painted with two or more coats of synthetic enamel paint of required shade and of approved brand & manufacture over priming coat of zinc chromate yellow primer (vertical MS-Tee support to be painted in black and white colours). Backside of aluminum sheet to be painted with two or more coats of epoxy paint over and including appropriate priming coat including all leads and lifts etc. complete as per drawing , specification and direction of Engineer-in-charge. Cautionary /warning sign boards circular shape having each side of 750 mm with support length of 3000 mm. (Rate including material, labour, wastage etc complete nothing extra payable). SPEED LIMIT 30KM/HOUR WITH POLE. Bidder to submit shop drawing based on attached Annex-B for signage.	10.00	Each	3,813.56	38135.60
2	Design, manufacturing, supply and fixing of retro reflective sign boards made up of 2 mm thick aluminum sheet, face to be fully covered with high intensity encapsulated type heat activated retro reflective sheeting conforming to type - IV of ASTM-D 4956-01 in blue and silver white or other colour combination including subject matter, message (bi-lingual), symbols and borders etc. as per IRC ; 67:2001, pasted on substrate by an adhesive backing which shall be activated by applying heat and pressure conforming to class -2 of ASTM-D-4956-01 and fixing the same with suitable sized aluminum alloy rivets @ 20 cm c/c to back support frame of M.S. angle iron of size 25x25x3 mm along with theft resistant measures, mounted and fixed with 2 Nos. M.S. angles of size 35x35x5 mm. Backside of aluminum sheet to be painted with two or more coats of epoxy paint over and including appropriate priming coat including all leads and lifts etc. complete as per drawing , specification and direction of Engineer-in-charge. Cautionary /warning sign boards of Circular shape having 750 mm . Fixing on existing post. (Rate including material, labour, wastage etc complete nothing extra payable) SPEED LIMIT 30KM/HOUR WITHOUT POLE Bidder to submit shop drawing based on attached Annex-B for signage.	5.00	Each	2,118.64	10593.20

3	Design, manufacturing, supply and fixing of retro reflective sign boards made up of 2 mm thick aluminum sheet, face to be fully covered with high intensity encapsulated type heat activated retro reflective sheeting conforming to type - IV of ASTM-D 4956-01 in blue and silver white or other colour combination including subject matter, message (bi-lingual), symbols and borders etc. as per IRC ; 67:2001, pasted on substrate by an adhesive backing which shall be activated by applying heat and pressure conforming to class -2 of ASTM-D-4956-01 and fixing the same with suitable sized aluminum alloy rivets @ 20 cm c/c to back support frame of M.S. angle iron of size 25x25x3 mm along with theft resistant measures, mounted and fixed with 2 Nos. M.S. angles of size 35x35x5 mm. Backside of aluminium sheet to be painted with two or more coats of epoxy paint over and including appropriate priming coat including all leads and lifts etc. complete as per drawing , specification and direction of Engineer-in-charge. Cautionary /warning sign boards of Circular shape having 750 mm . Fixing on existing post. (Rate including material, labour, wastage etc complete nothing extra payable) . SPEED LIMIT 5 KM/HOUR WITHOUT POLE Bidder to submit shop drawing based on attached Annex-B for signage.	40.00	Each	2,118.64	84745.60
4	Design, manufacturing, supply and fixing of retro reflective sign boards made up of 2 mm thick aluminum sheet, face to be fully covered with high intensity encapsulated type heat activated retro reflective sheeting conforming to type - IV of ASTM-D 4956-01 in blue and silver white or other colour combination including subject matter, message (bi-lingual), symbols and borders etc. as per IRC ; 67:2001, pasted on substrate by an adhesive backing which shall be activated by applying heat and pressure conforming to class -2 of ASTM-D-4956-01 and fixing the same with suitable sized aluminum alloy rivets @ 20 cm c/c to back support frame of M.S. angle iron of size 25x25x3 mm along with theft resistant measures, mounted and fixed with 2 Nos. M.S. angles of size 35x35x5 mm. Backside of aluminum sheet to be painted with two or more coats of epoxy paint over and including appropriate priming coat including all leads and lifts etc. complete as per drawing , specification and direction of Engineer-in-charge. Cautionary /warning sign boards size Triangle Size 750mmx750mm, rectangular 750x300mm with pole . (Rate including material, labour, wastage etc complete nothing extra payable) . PEDESTRIAN PRIORITY WITH POLE Bidder to submit shop drawing based on attached Annex-B for signage.	10.00	Each	2,542.37	25423.70
5	Design, manufacturing, supply and fixing of retro reflective sign boards made up of 2 mm thick aluminum sheet, face to be fully covered with high intensity encapsulated type heat activated retro reflective sheeting conforming to type - IV of ASTM-D 4956-01 in blue and silver white or other colour combination including subject matter, message (bi-lingual), symbols and borders etc. as per IRC ; 67:2001, pasted on substrate by an adhesive backing which shall be activated by applying heat and pressure conforming to class -2 of ASTM-D-4956-01 and fixing the same with suitable sized aluminum alloy rivets @ 20 cm c/c to back support frame of M.S. angle iron of size 25x25x3 mm along with theft resistant measures, mounted and fixed with 2 Nos. M.S. angles of size 35x35x5 mm. Backside of aluminium sheet to be painted with two or more coats of epoxy paint over and including appropriate priming coat including all leads and lifts etc. complete as per drawing , specification and direction of Engineer-in-charge. Cautionary /warning sign boards size 900 x 600 mm. Fixing on existing post. (Rate including material, labour, wastage etc complete nothing extra payable) NO TRESPASSING WITHOUT POLE Bidder to submit shop drawing based on attached Annex-B for signage.	2.00	Each	1,694.92	3389.84

6	Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) backfilling after that getting out and disposal of excavated earth lead upto 50 m and for all lift as directed by Engineer-in-charge. Rate including excavation all kind of soil, breaking PCC, removing & refixing pavers etc complete. (Rate including material, labour, wastage etc complete nothing extra payable)	5.00	Cum	150.42	752.10
7	Providing and laying M 20 grade cement concrete in retaining walls, return walls, walls (any thickness) including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window sills, fillets, sunken floor etc. excluding the cost of centering, shuttering and finishing: All work up to plinth level. (Rate including material, labour, wastage etc complete nothing extra payable)	5.00	Cum	6,676.69	33383.45
8	Centering and shuttering including strutting, propping etc. and removal of form work for : Foundations, footings, bases for columns. (Rate including material, labour, wastage etc complete nothing extra payable)	25.00	Sqm	332.33	8308.25
9	Supply and installation of Rubber speed breakers of size 500mm X 400mm X 50mm with installation including application of epoxy adhesive and anchor fasteners in bitumen/rcc pavements as per site conditions. Variation in size shall be liable of rejection. Quoted rate shall be including cost of material , labour, transportation , installation, cost of minimum 150mm anchor fasteners and adhesive etc. complete. Nothing extra shall be paid separately. Approved Makes : Vertex / Fiber Craft/S3PL	72.00	Rmt	1,725.42	124230.24
Total Amount without GST (A)					3,28,961.98

Bidder to write + / - before quoted percentage. Quote percentage is + / - (strikeout which is not applicable) %	B 	Bidder to write amount worked out as per quoted percentage. (B = A X Quoted percentage with +/- sign)
Grand Total amount without GST	A+B 	(A+B)

GST SHALL BE PAID EXTRA AS PER PREVELLING RATES.

अधीक्षण अभियंता /Superintending Engineer

Annex- B

(Reference image and proof shall be submitted by agency before production.)

ALL IMAGES OF ANNEX-B ARE INDICATIVE, FINAL ARTWORK MAY VARY.

Item no. -1 (Both side with post)




THO

Item no. - 2 (For one side)



Item no. -3 (For one side)

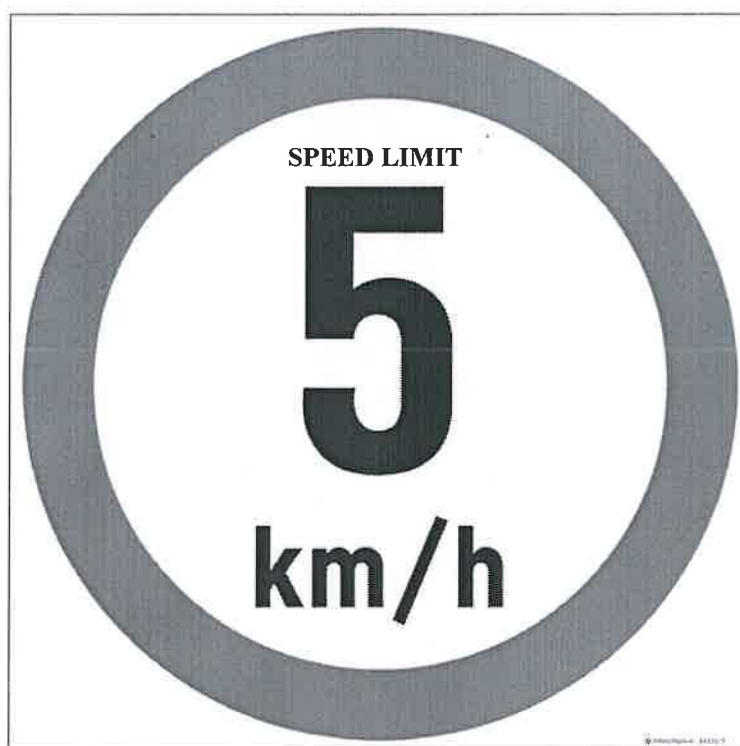

70

Item no. -4 (with pole, Triangle Size 750mmx750mm and rectangular 750x300mm)



Item no. - 5 (For one side 900mmx600mm)



70