

कोटेशन आमंत्रित करने की सूचना
NOTICE INVITING QUOTATION

सीपीडब्ल्यूडी, महाराष्ट्र राज्य पीडब्ल्यूडी, रेलवे, एमईएस के साथ पंजीकृत योग्य ठेकेदारों से 27/03/2025 को अपराह्न 3.00 बजे तक नीचे उल्लिखित कार्य के लिए निदेशक, आईआईएसईआर पुणे की ओर से अधोहस्ताक्षरी द्वारा दो लिफाफा प्रणाली में मुहरबंद कोटेशन आमंत्रित किए जाते हैं। नीचे उल्लिखित कार्य के लिए सिविल / समग्र श्रेणी (कोई एक) या साइनेज के डीलर/निर्माता अनुमोदित आवेदकों की उचित श्रेणी में। कोटेशन उसी दिन अपराह्न 3.30 बजे खोले जाएंगे।

Sealed quotations in two envelop system are hereby invited by the undersigned on behalf of the Director, IISER Pune for the work mentioned below up to 3.00 PM on 27/03/2025 from eligible contractors registered with anyone CPWD, Maharashtra State PWD, Railways, MES in appropriate category of Civil/Composite category (any one) or dealer/manufacturers of signages for the work mentioned below. The quotations will be opened at 3.30 PM on the same day.

कार्य का नाम: आईसर पुणे में पाषाण गेट पर पाइलन साइनेज और मुख्य प्रवेश द्वार नाम प्लेट की आपूर्ति और स्थापना।

NAME OF WORK : SUPPLY AND INSTALLTION OF PYLON AND MAIN ENTRY GATE NAME PLATE AT PASHAN GATE AT IISER PUNE.

Issue to –

ठेकेदार का नाम और पता -

Name and address of the agency –

नियम और शर्तें:

Terms and Conditions:

आवेदक सीपीडब्ल्यूडी, महाराष्ट्र राज्य पीडब्ल्यूडी, रेलवे या एमईएस में वैध पंजीकरण प्रमाण पत्र के साथ सिविल / कम्पोजिट की उपयुक्त श्रेणी में पंजीकृत पात्र ठेकेदार होना चाहिए या साइनेज के डीलर/निर्माता कोटेशन के साथ प्रस्तुत किए जाने वाले अनुभव प्रमाण पत्र के साथ चाहिए। न्यूनतम पात्रता मानदंडों को पूरा नहीं करने वाले बोलीदाताओं को सरसरी तौर पर खारिज कर दिया जाएगा।

The applicant should be eligible contractors registered with anyone CPWD, Maharashtra State PWD, Railways, MES in appropriate category of Civil/Composite with valid Registration Certificate or dealers/manufacturers of signages with Experience Certificate to be submitted along with the quotation. Bidders not meeting the minimum eligibility criteria shall be summarily rejected.

- 1) कार्य पूरा करने की समय अवधि आईआईएसईआर पुणे द्वारा कार्य आदेश देने की तिथि से 30 (तीस) दिन होगी। कोटेशन खोलने के बाद बैक-आउट का कार्य ऐसी एजेंसियों को आईआईएसईआर पुणे के भविष्य के कोटेशन में भाग लेने से वंचित कर देगा। बोलीदाता maintenance@iiserpune.ac.in पर ई-मेल कर सकते हैं या उपरोक्त निर्दिष्ट कोटेशन जमा करने की तिथि से एक दिन पहले सभी कार्य दिवसों पर हार्ड कॉपी में आईआईएसईआर पुणे कार्यालय में जमा कर सकते हैं।



Time period for completion of the work shall be 30 (Thirty) Days from the date of placing the work order by IISER Pune. The act of backing-out after opening of quotation will debar such agencies for participating in the future quotations of IISER PUNE. Bidder may e-mail queries on mailto:enquiry@iiserpune.ac.in or submit to IISER PUNE office in hard copy on all working days one day before submission date of quotation as specified above.

- 2) सूचना आमंत्रण (एनआईक्यू) दस्तावेज आईआईएसईआर पुणे से 121, इंजीनियरिंग अनुभाग, मुख्य भवन, आईआईएसईआर पुणे परिसर, डॉ होमी भाभा रोड, पाषाण, पुणे-411008 से सभी कार्य दिवसों में सुबह 10 बजे से शाम 4 बजे के बीच प्राप्त किया जा सकता है। प्रस्तुत करने। आवेदक आईआईएसईआर पुणे की वेबसाइट <http://www.iiserpune.ac.in/links/tender-notices-and-eoi> से एनआईक्यू दस्तावेज प्राप्त करके कोटेशन जमा कर सकते हैं।

Notice Inviting Quotation (NIQ) document may be obtained from IISER PUNE at 121, Engineering Section , Main Building, IISER PUNE Campus, Dr.Homi Bhabha Road, Pashan, Pune-411008 between 10 AM to 4 PM on all working days before date of submission. Applicant may submit quotation by obtaining NIQ document from IISER PUNE website at <http://www.iiserpune.ac.in/links/tender-notices-and-eoi>

- 3) सभी एजेंसियों को अपना कोटेशन हार्ड कॉपी में एक सीलबंद लिफाफे में दो लिफाफों में एक तकनीकी क्रेडेंशियल्स और दूसरा वाणिज्यिक प्रस्ताव उचित माध्यम से नियत तिथि पर अपराह्न 3 बजे तक जमा करना होगा। ऊपर निर्दिष्ट तिथि और समय के बाद प्राप्त कोटेशन स्वीकार नहीं किया जाएगा। किसी भी देरी, डाक देरी आदि पर विचार नहीं किया जाएगा। एजेंसी को मात्रा के संलग्न बिल के लिए केवल प्रतिशत दर उद्धृत करनी चाहिए। शब्दों में उद्धृत प्रतिशत दर को एल1 बोलीदाता तय करने के लिए अंतिम माना जाएगा। बोली को मूल बोली दस्तावेज (आईआईएसईआर, पुणे या वेबकॉपी द्वारा जारी किए गए अनुसार) में कार्य के नाम के ऊपर लिखा हुआ प्रस्तुत किया जाएगा। कोटेशन खोलने की तारीख से 60 दिनों के लिए उद्धृत दर वैध होगी। प्रतिशत को एनआईक्यू दस्तावेज में उपलब्ध कराए गए स्थान पर हाथ से लिखा जाना चाहिए। तकनीकी रूप से योग्य बोलीदाताओं के वाणिज्यिक लिफाफे तदनुसार खोले जाएंगे। एजेंसी द्वारा इस कोटेशन के सभी नियमों और शर्तों की स्वीकृति सहित एजेंसी का प्रस्ताव व्यावसायिक रूप से स्पष्ट होना चाहिए। आईआईएसईआर पुणे बिना कोई कारण बताए कोटेशन/कोटेशनों को स्वीकार या अस्वीकार करने का अधिकार सुरक्षित रखता है। एल1 बोलीदाता के बारे में प्रभारी अभियंता का निर्णय अंतिम होगा।

All agencies need to submit their quotation in hard copy in one sealed envelope containing two envelopes one technical credentials and second commercial offer by suitable means on and before 3 PM on due date. Quotation received after the date & time specified above shall not be accepted. Any delays , postal delay etc. will not be entertained. Agency should quote only percentage rate for the attached bill of quantity. Percentage Rate quoted in the words shall be treated as Final for deciding L1 bidder. The bid shall be submitted in the original bid document (as issued by the IISER, Pune or Webcopy) super scribing the name of work. Quoted rate shall be valid for 60 days from the date of opening of quotations. Percentage shall be quoted in hand writing in the spaces provided in NIQ document. Commercial envelopes of only technically qualified bidders shall be opened accordingly. The offer of the agency should be commercially clear including acceptance of all terms and conditions of this Quotation by the agency. IISER Pune reserves the right to accept or reject the quotation/s without assigning any reasons. Engineer In-charge decision about L1 bidder shall be final.

- 4) बोली उसी दिन अपराह्न 3.30 बजे एजेंसी या उनके अधिकृत प्रतिनिधियों, यदि कोई हो, की उपस्थिति में खोली जाएगी। किसी भी शर्त के साथ



Handwritten signature or initials.

जमा किए गए कोटेशन को सशर्त कोटेशन माना जाएगा और आईआईएसईआर पुणे द्वारा सरसरी तौर पर खारिज कर दिया जाएगा।

Bids will be opened **on the same day at 3.30 PM** in the presence of agency or their authorized representatives, if any. Quotations submitted with any conditions shall be treated as conditional quotations and shall be summarily be rejected by IISER PUNE.

5) उद्धृत दरों में सभी सामग्रियों की लागत, श्रम लागत, जीएसटी (अतिरिक्त) , सभी कर, रॉयल्टी, ईंधन की लागत, ऑपरेटर, चुंगी, शुल्क, नमूने की लागत और प्रयोगशालाओं, रॉयल्टी आदि में सामग्री के परीक्षण के लिए शुल्क शामिल होना चाहिए। अतिरिक्त कुछ भी अलग से भुगतान नहीं किया जाएगा। बोलीदाता अपनी बोली से संबंधित किसी भी मामले में बोली खुलने के समय से कार्य आदेश जारी करने के समय तक आईआईएसईआर, पुणे से संपर्क करेगा नहीं। बोलीदाता द्वारा आईआईएसईआर पुणे के बोली मूल्यांकन, बोली तुलना या अनुबंध पुरस्कार निर्णयों को प्रभावित करने के किसी भी प्रयास के परिणामस्वरूप उसकी बोली को अस्वीकार किया जा सकता है। इस कार्य से संबंधित सभी मामलों में सक्षम प्राधिकारी / प्रभारी अभियंता का निर्णय अंतिम और बोली लगाने वाले के लिए बाध्यकारी होगा।

Quoted percentage shall be inclusive of cost of all the materials, labour cost , **GST EXTRA** ,all taxes, royalties, cost of fuel, operator , octroi , duties , cost of sample and fees towards testing of materials in labs ,royalties etc. complete. Nothing extra shall be paid separately. No, Bidder shall contact the IISER, Pune on any matter relating to his bid from the time of the bid opening to the time of issue of work order. Any effort by the Bidder to influence the IISER's bid evaluation, bid comparison or contract award decisions, may result in the rejection of his bid. Decision from competent authority/Engineer In-charge shall be final and binding to bidder in all the matters relating this work.

- 5) सभी स्वीकृत निर्माण बीओक्यू में निर्दिष्ट के अनुसार होंगे और सीपीडब्ल्यूडी विनिर्देशों के अनुसार, एजेंसी को तकनीकी डेटा डालना चाहिए और काम शुरू करने से पहले आईआईएसईआर पुणे के विभिन्न सामग्रियों के निर्माण पर पूर्व अनुमोदन प्राप्त करना चाहिए। सफल एजेंसी कार्य पूरा होने के मद्देनजर कार्य आदि के लिए सभी उपकरण और टैकल की अपनी व्यवस्था स्वयं करेगी। एजेंसी को एक स्रोत पर बिजली निःशुल्क उपलब्ध कराई जाएगी, एजेंसी को स्रोत से कार्य स्थल तक सुरक्षित रूप से बिजली के दोहन की व्यवस्था स्वयं करनी चाहिए। किसी भी आवश्यक मचान को आईआईएसईआर पुणे को बिना किसी लागत के काम पूरा करने के लिए ठेकेदार द्वारा लाया जाएगा।

All approved makes shall be as specified in BOQ and as per CPWD specifications, agency should put-up technical data and obtain prior approval on makes of various materials of IISER PUNE before taking-up work. The successful agency shall make his own arrangement for all Tools & tackles for work etc. complete in view of completion of work. Electricity shall be provided free of cost to agency at one source, agency should make own arrangement to safely tap of power from source to work location. Any scaffolding required shall be brought by contractor to complete the work with no cost to IISER Pune.

- 6) आईआईएसईआर पुणे द्वारा कोई अग्रिम भुगतान नहीं किया जाएगा। उद्धृत दरों में जीएसटी, टीडीएस और अन्य लागू कर शामिल होने चाहिए। काम के बिल से इनकम टैक्स और लेबर सेस की कटौती की जाएगी।

No advance payment shall be made by IISER Pune. BOQ rates should be **excluding GST** and including TDS and other applicable taxes . Income Tax and labour cess will be deducted from the bills of the work.

- 7) कार्य बीओक्यू नवीनतम सीपीडब्ल्यूडी विनिर्देश, आईएस विनिर्देशों और आईआईएसईआर पुणे के निर्देश के अनुसार होने चाहिए। जब भी सीपीडब्ल्यूडी / आईएस विनिर्देश उपलब्ध नहीं हैं आईआईएसईआर पुणे के निर्देश के अनुसार होने चाहिए।



Specification for the work to be carried out as per BOQ, latest CPWD specification, IS specifications & as per instruction of IISER PUNE whenever specification CPWD/ IS specification are not available.

- 8) ठेकेदार यह सुनिश्चित करेगा कि श्रमिकों और कर्मचारियों को श्रम कानूनों के अनुसार न्यूनतम मजदूरी का भुगतान किया जाए। सभी आवश्यक सुरक्षा उपकरणों आदि के साथ कार्य के निष्पादन के दौरान निर्धारित मानदंडों के अनुसार एल 1 एजेंसी द्वारा मापी गई सभी सुरक्षा का पालन किया जाएगा। निष्पादन एजेंसी सुरक्षा मानदंडों और संबद्ध मुआवजे आदि के सख्त पालन के लिए एकमात्र तकनीकी-व्यावसायिक रूप से जिम्मेदार होगी।

The contractor shall ensure that minimum wages should be paid to the labours and employees in accordance with labour laws. All the safety measures shall be followed by the L1 agency as per prescribed norms during execution of work with all the necessary safety tools etc. Executing Agency shall be solely techno-commercially responsible for the strict adherence of safety norms and allied compensations etc.

- 9) एजेंसी को काम पूरा होने के 30 दिनों के भीतर भुगतान के लिए आईआईएसईआर पुणे को माप और सार पत्रक प्रस्तुत करना चाहिए।

Agency should submit measurements and abstract sheets to IISER PUNE for the payments within 30 days from completion of work. **GST shall be paid extra on BOQ rates.**

THIS IS PERCENTAGE RATE QUOTATION, BIDDER TO QUOTE PERCENTAGE ABOVE/BELOW ESTIMATED COST.

GST SHALL BE EXTRA AS PER PREVAILING RATES.


अधीक्षण अभियंता

Superintending Engineer

संलग्नक: - मात्रा की अनुसूची (बीओक्यू) - अनुलग्नक ए के अनुसार

Encl : - Schedule of Quantity (BOQ) – As per Annexure A





ANNEX-A

कार्य का नाम: आईसर पुणे में पाषाण गेट पर पाइलन गेट पर पाइलन साईनेज और मुख्य प्रवेश द्वार नाम प्लेट की आपूर्ति और स्थापना।

NAME OF WORK : SUPPLY AND INSTALLATION OF PYLON AND MAIN ENTRY GATE NAME PLATE AT PASHAN GATE AT IISER PUNE.

BILL OF QUANTITY

ITEM NO	DESCRIPTION	QT Y.	UNIT	RATE WITHOUT GST	AMOUNT (Rs.)
1	<p>PYLON : Supply and Installation of Pylon Signage with following details , The pylon signage shall be double-sided, ensuring visibility from both directions at the IISER Pune entry gate. Pylon Dimensions : Height : 3.7 meters , Width : 1.7 meters, Depth: 300mm with tolerance of +/- 10%</p> <p>2. Materials and Specifications :</p> <p>2.1 Existing MS Structure : Removal of existing pylon, removing existing wrapping around MS structure and handing over to IISER Pune and utilize the existing MS structure for the new pylon. The bidder shall assess the requirement for any additional stiffening and boxing to achieve approved pylon design and ensure the structural integrity of the signage for a stable pylon. Any additional stiffening required or as instructed by the Engineer In-charge shall be provided by the bidder and shall be included in the quoted rate.</p> <p>2.2 Providing and fixing FR Grade ACP (Fire Retardant Aluminum Composite Panel) Wrapping : Wrap the MS structure with 4mm FR ACP sheet of (0.5mm Aluminum +3mm FR Core +0.5 aluminum) composite sheet of approved colour of any type metallic/silver etc complete, shade, and make. The ACP sheet should be weather-resistant and durable. There shall be service access to both sides of the pylon enabling repairs of electrical fittings/ LED's etc for future maintenance and electrical work. Any aluminum extrusions/sections required in the structure of the signage shall be shown in the shop drawings and to be included in the quoted rate. Approved Make : Alucobond/Eurobond/Uroneel</p> <p>2.3 Laser Cut Name plate : Making laser-cut text for "Indian Institute of Science Education and Research, (IISER) Pune" in both English and Hindi as per the approved design and shop drawing as per aspect ratio approved by Engineer In-charge. Font sizes shall be best fit to pylon sizes as</p>	1.00	each	234,084.00	234,084.00



<p>per aspect ratio. The font and size should adhere to the approved specifications and ensuring high visibility.</p> <p>2.4 Acrylic Inlay : Inlay to be done behind laser cut text by using approved 'Acrylic material' as per the approved sample signage. Acrylic inlay shall match the surface of the laser cut text in the ACP, there should not be any offset in the laser cut edges and acrylic inlay. The acrylic should be of good quality, ensuring longevity and colour retention. All Acrylic inlay letters should be visible as Black colour in day and shall glow white at night. Logo shall be backlit. Power shall be provided at the Pylon location. Suitable cabling in conduit required for pylon lighting from power tapping point shall be in the scope of bidder.</p> <p>2.5 Prominent IISER Pune Logo: To Provide a prominent backlit IISER Pune logo on the both sides of pylon as per the approved design. The logo should be clearly visible and match the colour and style specifications as per inputs provided by the Engineer In-charge.</p> <p>2.6 Internal LED Lighting : Supply and install Chip based LED lights inside the pylon structure, ensuring uniform illumination of the nameplate and logo. The lighting should provide good visibility at night. Ensure that the LEDs are energy-efficient and durable, conforming to the approved specifications. Approved Makes : Philips/Nichia/Cree/Osram.</p> <p>The structure should be waterproof and weather proof. All joints shall be sealed with weather proof sealant of matching colour ensuring water should not enter inside the structure. This BOQ item includes the supply, fabrication, cost of scaffolding, ACP, laser cutting, aluminum extrusions, backlit logos , LED lighting and installation of the signage at IISER Pune, ensuring all materials, design, and installation practices conform to the approved samples and specifications. Bidder shall submit shop drawings for approval of Engineer In-charge before actual manufacturing of pylon. GST shall be paid extra as per prevailing market rates.</p>		1.00	each	71,653.00	71,653.00
<p>2. Materials and Specifications :</p> <p>2.1 Existing MS Structure : Removal of existing name plate and handing over to IISER Pune. MS structure for the new name plate shall be got approved from Engineer In-charge. The bidder</p>					



shall assess the requirement to ensure the structural integrity of the signage. Any additional stiffening required or as instructed by the Engineer In-charge shall be provided by the bidder with no extra cost.

2.2 Providing and fixing FR Grade ACP (Fire Retardant Aluminum Composite Panel) Wrapping : Wrap the MS structure with 4mm FR ACP sheet of (0.5mm Aluminum +3mm FR Core +0.5 aluminum) composite sheet of approved colour of any type metallic/silver etc complete, shade, and make. The ACP sheet should be weather-resistant and durable. There shall be service access to both sides of the signage enabling repairs of electrical fittings/ LED's etc for future maintenance and electrical work. Any aluminum extrusions/sections required in the structure of the signage shall be shown in the shop drawings and to be included in the quoted rate.

Approved Make : Alucobond/Eurobond/Uroneel

2.3 Laser Cut Nameplate : Provide laser-cut text for "Indian Institute of Science Education and Research, (IISER) Pune" and CSIR-NCL Innovation Complex in both English and Hindi as per the approved design as per aspect ratio approved by Engineer In-charge. The font and size should adhere to the approved specifications, ensuring high visibility and legibility. All letters should be black colour in day and shall glow white at night. Logo shall be backlit. Power shall be provided at the Name plate location. Suitable cabling in conduit required for Name Plate lighting from power tapping point shall be in the scope of bidder.

2.4 Acrylic Inlay : Inlay to be done behind laser cut text by using approved 'Acrylic material' as per the approved sample signage. Acrylic inlay shall match the surface of the laser cut text in the ACP, there should not be any offset in the laser cut edges and acrylic inlay. The acrylic should be of good quality, ensuring longevity and colour retention. **All Acrylic inlay letters should be visible as Black colour in day and shall glow white at night. Logo shall be backlit. Power shall be provided at the location. Suitable cabling in conduit required for lighting from power tapping point shall be in the scope of bidder.**

2.5 Prominent backlit IISER Pune and CSIR Logo: To Provide a prominent IISER Pune and CSIR logo on the signage as per the approved design. The logo should be clearly visible and match the colour and style specifications as per inputs provided by the Engineer In-charge.

2.6 Internal LED Lighting : Supply and install Chip based LED lights inside the Name plate structure, ensuring uniform illumination of the nameplate and logo. The lighting should provide good



MQ

	<p>visibility at night. Ensure that the LEDs are energy-efficient and durable, conforming to the approved specifications. Approved Makes : Philips/Nichia/Cree/Osram.</p> <p>The structure should be waterproof and weather proof. All joints shall be sealed with weather proof sealant of matching colour ensuring water should not enter inside the structure. This BOQ item includes the supply, fabrication, cost of scaffolding, ACP, laser cutting, aluminum extrusions, backlit logos, LED lighting and installation of the signage at IISER Pune, ensuring all materials, design, and installation practices conform to the approved samples and specifications. <u>Bidder shall submit shop drawings for approval of Engineer In-charge before actual manufacturing of signage.</u> GST shall be paid extra as per prevailing market rates.</p>	1.00	Job	74,612.50	74,612.00
3	<p>Providing and laying M30 concrete platform of size 1.53 X 0.6 X 2.25 for the base of pylon. Concrete base made for the pylon shall be covered by providing and fixing of approved color granite of 18mm with CM 1:4, all joints shall be filled with expandable external filler. Quote rate shall be including clearing existing surface, making joint between new and old concrete and 8mm nominal reinforcement at top, bottom and side faces at 150mm center to center including cost of shuttering etc complete. The size and shape of the platform and granite cladding design, pattern, colour shall be as per the drawing issued by Engineer In-charge, IISER Pune.</p>				
Total Amount without GST (A)				3,80,349.00	
	<p>Bidder to Quote percentage Here Bidder to strike out appropriately + / -</p>	↑			(Bidder to write % and + / - here)
	<p>Bidder to write amount based on quoted percentage</p>	↑			(B= A* +/- Quoted percentage)
	<p>Total amount</p>	↑			(A+B OR A-B)



PERCENTAGE RATE QUOTATION. BIDDER TO WRITE ABOVE/BELOW ESTIMATED COST.

GST SHALL BE PAID EXTRA AS PER PREVELLING RATES.




 अभियंता /Superintending Engineer


Annex- B
SAMPLE IMAGES OF REQUIRED SIGNAGE STYLE

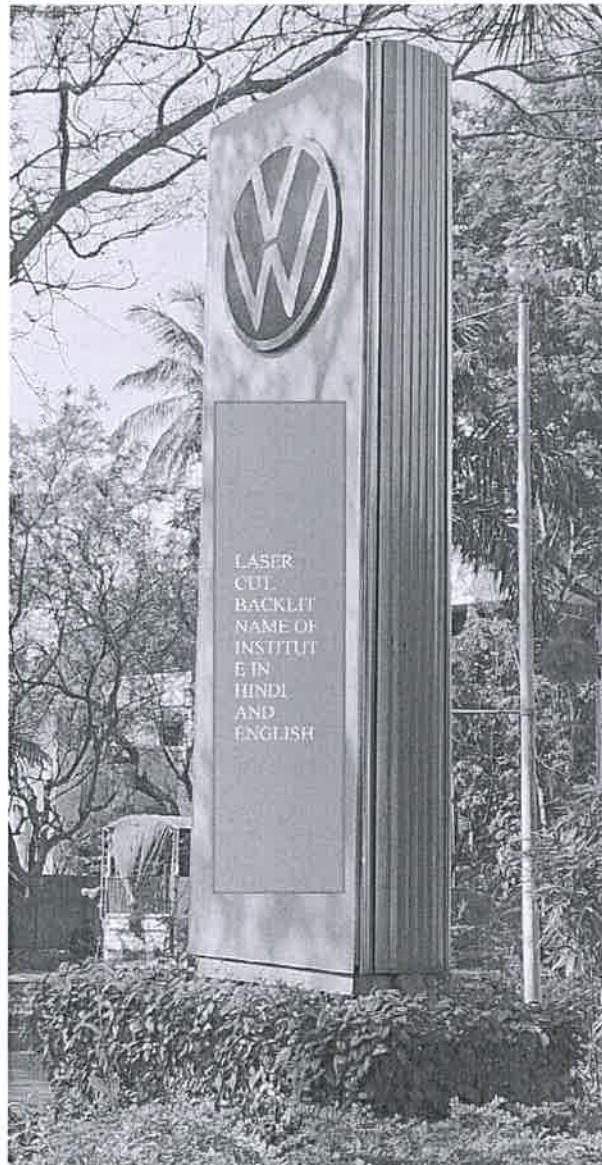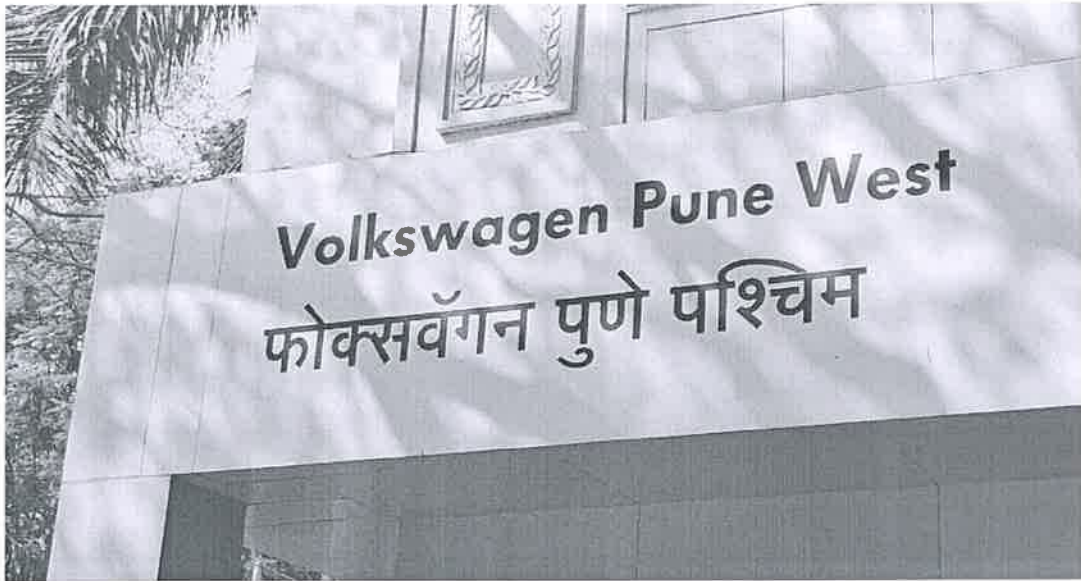

PROPOSED LOCATION OF PYLON AT IISER PUNE PASHAN GATE.



PROPOSED LOCATION OF NAME PLATE AT IISER PUNE PASHAN GATE.

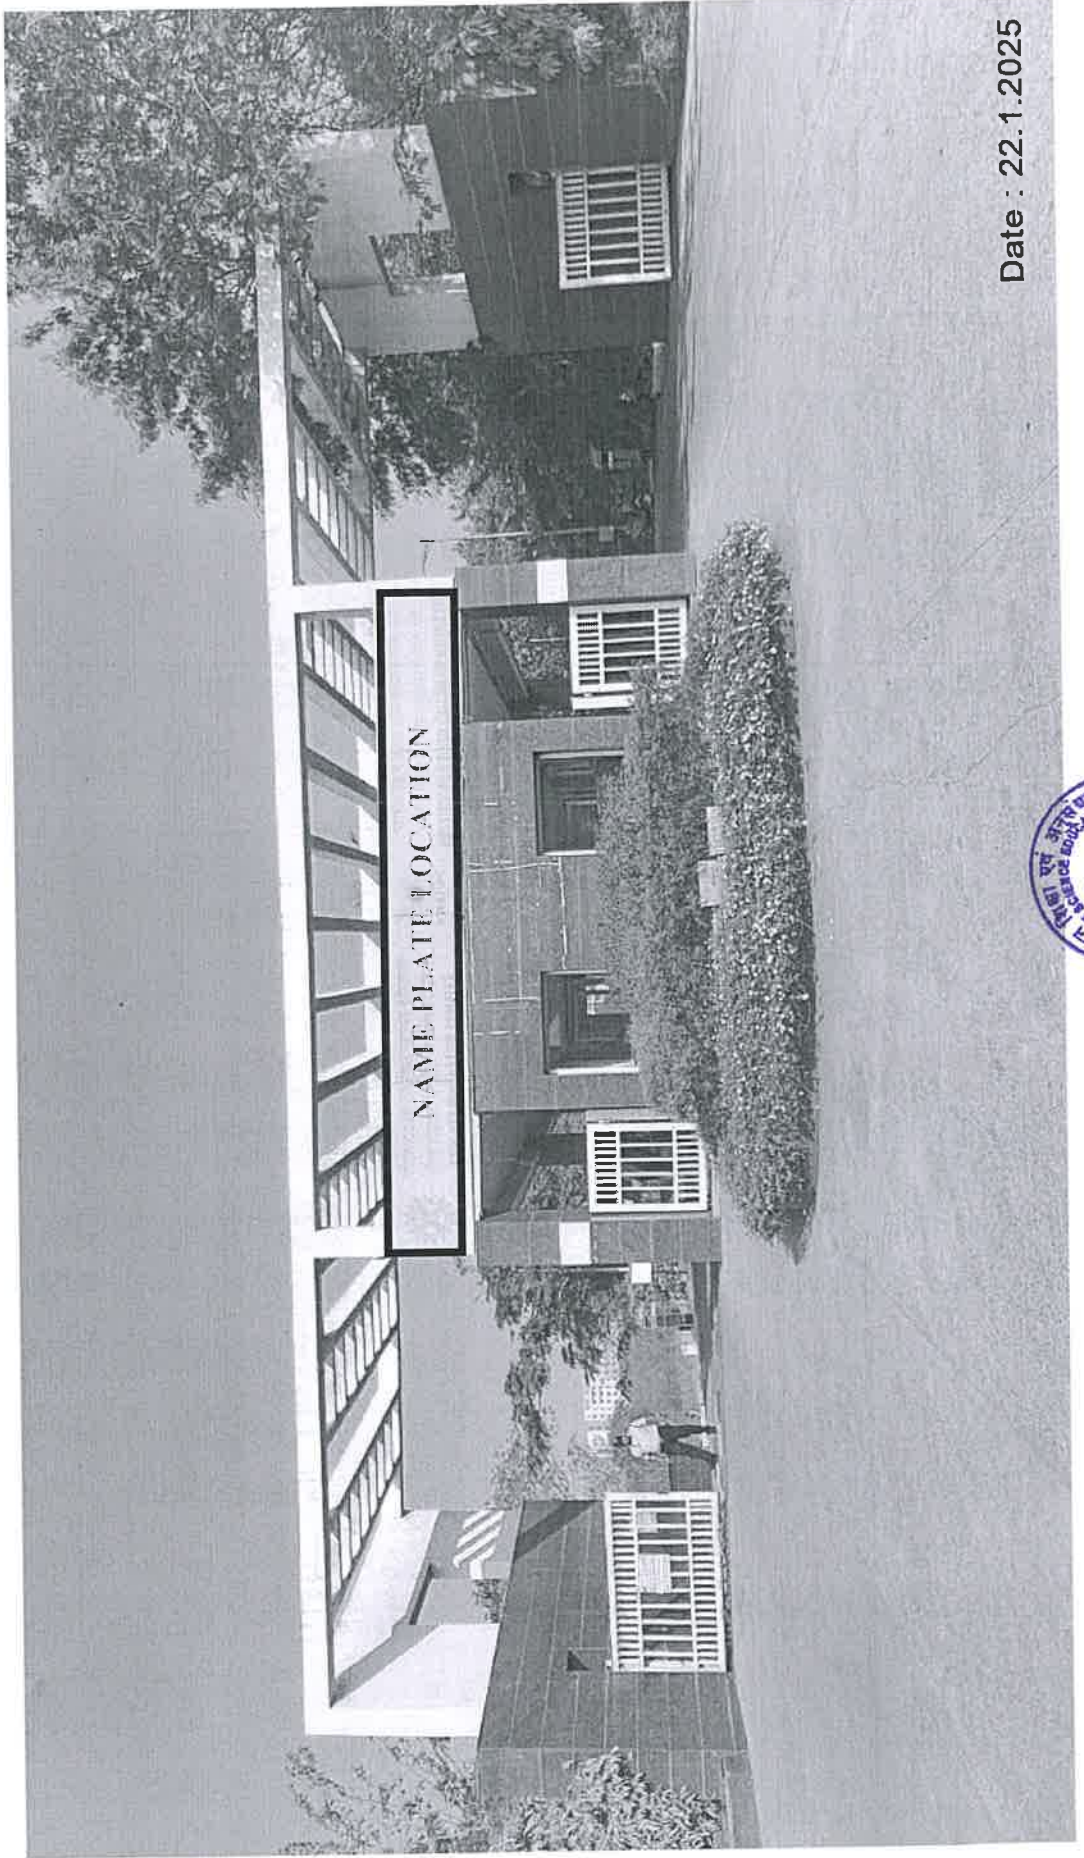

Date : 22.1.2025

